



PRODUCT DATA

POLYFLEX® PF-359

Polyflex® PF-359 is a co-extruded, multi-layer EDGE SEAL BAND for glass and glass-plastic laminates.


Polyflex® PF-359 is specially designed to prevent migration of the black layer into the laminate interface. The Black side of the band is a High Melt Temperature Polyurethane which remains intact during the melting and fusing of the Transparent side to the edge of the laminate.

Polyflex® PF-359 provides shock protection to the edges of glass and glass - plastic composites, and guards against infiltration of moisture or solvents, plasticizers, etc from sealants and adhesives.

Polyflex® PF-359 is designed for application during autoclaving of laminated glass and plastic composites.

Polyflex® PF-359 consists of Two layers of polyurethane co-extruded to form an integral film. A polyethylene release film is applied to the **BLACK** side of the band

The product consists of THREE layers:

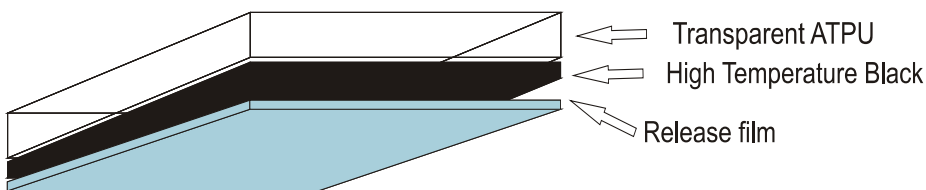

**A. Clear Aliphatic TPU
with Grooved surface**

**B. High Temperature
black Polyurethane**

**C. Polyethylene release
film (Peelable)**

